


## HD-AM260DTL

### General Features

- \* 1/3" 1.3 Mega Sony Exmor Sensor (Imx138)
- \* 1000TVL Highest Resolution (Analog)
- \* Real WDR function
- \* Superior Low-light Performance
- \* 3D-DNR(Digital Noise Reduction)
- \* Motion Tracking
- \* Anti Blocking & Anti Shifting
- \* 18 IR LEDs (ø5)
- \* Min. Illumination : 0Lux
- \* Full OSD Operation

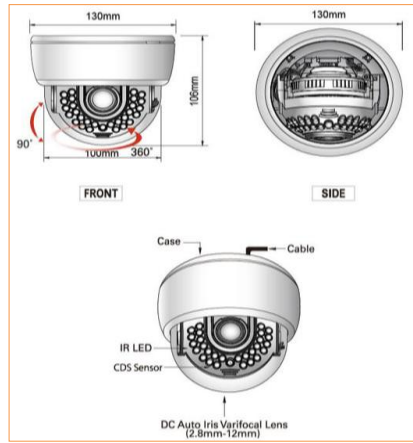

**HDPRO**  
HDPRO CO.,LTD.  
HD&KO CO.,LTD.



## SPECIFICATIONS

MODEL	HDPRO HD-AM260DTL
Image Pick-Up Device	1/3" Mega Sony Exmor Sensor (Imx 138)
TV System	NTSC, PAL
Total Pixels	1312(H) X 1069(V), 1.40M Pixels
Effective Pixels	1305(H) X 1049(V), 1.37M Pixels
Scanning System	Progressive Scan
Synchronization	Internal
O.S.D	Built-in
Backlight	OFF / HSBLC / BLC Selectable
Resolution	1000TV Lines
S/N (Y signal)	52dB
Min. Illumination	0.00001Lux(SENS-UP*32)
White Balance	AUTO/AUTO ext/AWC->SET/MANUAL
Electronic Shutter Speed	AUTO / Manual(1/60Sec ~ 1/60000Sec) / FLICKER
Sense-Up	x2 ~ x32, Default : x8
Gain Control	High, Middle, Low, Off Selectable
3 DNR	OFF/LOW/MIDDLE/HIGH
D-WDR	ON(LOW,MIDDLE,HIGH) / OFF
Motion Detection	ON / OFF (Programmable 4 Zones)
Privacy	ON / OFF (Programmable 16 Zones)
Mirror	ON/OFF
Freeze	On / Off
Sharpness	0~15 (Level Adjustable), Default : 7
D&N Selection	Color / BW / Auto/ EXT
Digital Zoom	On / Off(x1~x32)
DIS (Digital Image Stabilization)	X
Power Supply	DC 12V(Dual Voltage Operation)
Power Consumption	IR LED ON :500mA Max
Lens	DC Auto Iris Varifocal Lens(2.8-12mm)
Operational Temp.	-10 ~ +50 Deg C. RH 95% Max.
Storage Temp.	-20 ~ +60 Deg C. RH 95% Max.
Dimension	100mm(W) * 80mm(H) * 100mm(D)
Weight	700g



YOUR'S SMART SECURITY PROVIDER

**GENX TECHNOLOGY (M) SDN BHD**

NO.68-2, JALAN DWITASIK, DATARAN DWITASIK, BANDAR SRI PERMAISURI, 56000 KUALA LUMPUR, MALAYSIA  
TEL: 03-9171 1988 FAX:03-9171 4988

